


Low Noise Seed Laser

Key Features

- Output power 200mW
- Center wavelength in range 1530-1565 nm
- Low Frequency RIN peak eliminated with patented technology
- Amplitude Noise @ 100kHz - 100MHz : <-145dBc/Hz, @ >100MHz : <-168dBc/Hz (Shot noise limit)
- Frequency noise @>100Hz-<10dB-Hz/Hz^{-1/2}
- Narrow linewidth: <300Hz
- Good Wavelength stability (+/- 1GHz); with additional Princeton Optronics ultra stable wave locker, stability is +/- 5KHz over 30 mins.

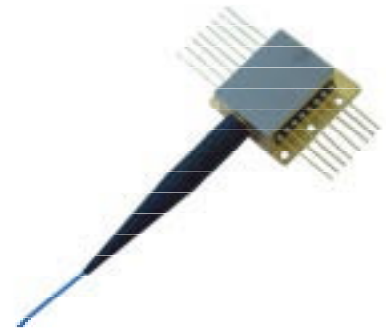


Applications

- Coherent LIDAR
- RF Links
- Sensing
- Coherent Communication
- Test & Measurement


Product Specifications

Temperature: 25°C

Parameter	Value
Wavelength range	1530 – 1560nm
Output Power	200mW
Wavelength Stability	+/- 0.5GHz
Wavelength Accuracy	50MHz
Tuning Range (Piezo)	20GHz
RIN (10KHz to 100MHz)	< -145dB/Hz
RIN (>100MHz)	< -165dB/Hz or shot noise limited
Frequency noise(@>100Hz)	<10db Hz/Hz ^{-1/2}
Line width	<300Hz
Side Mode Suppression Ratio(SMSR)	> 70dB
Power Stability	+/- 0.25dB
Connectors	FC/APC
Fiber pigtail	PM fiber, 1m long
Package Dimensions	1.1" X 1.1" X 0.5"

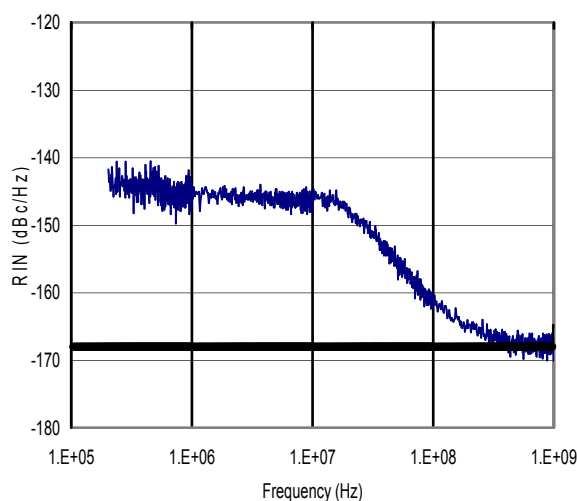

RIN measurement plot

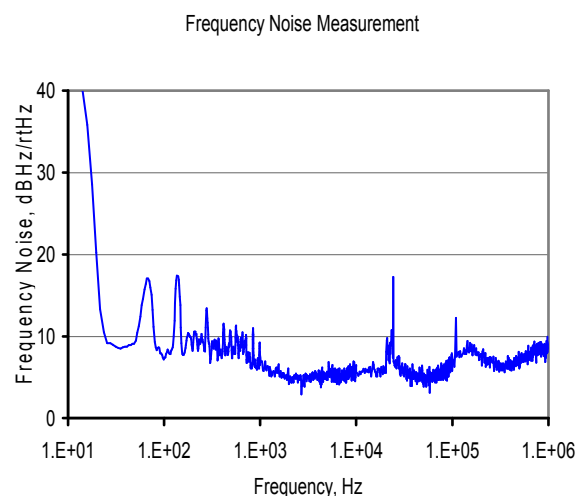

Frequency noise measurement plot

Notes.

1. Laser polarization aligned to slow axis of the fiber.
2. Performance dependent on the module electronics
3. Wavelength stability at constant temperature after acquisition.

Fiber Type: Fujikura Panda PMF with 900 micron Hytrel jacket

Fiber Length: 1.0 – 1.1 m

Termination: FC/APC (angled) connector



株式会社 エム スクエア <http://www.mxmco.com> info@mxmco.com

〒101-0051 東京都千代田区神田神保町1-34-2F TEL(03)3294-0560 FAX(03)3294-0563

〒815-0041 福岡市南区野間1-10-18 TEL(092)554-6800 FAX(092)554-6802