Product Data sheet (Preliminary)
PR-HPIL-40W808
March 3, 2010

High Power Laser Illuminator

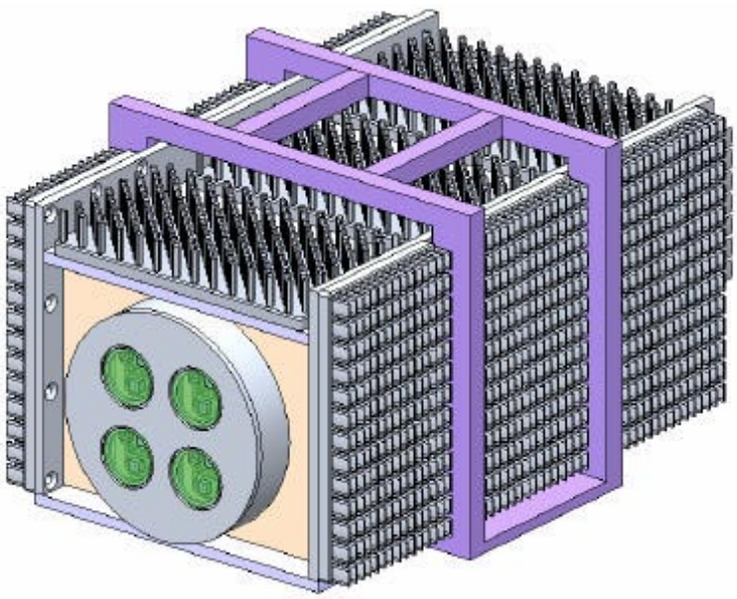

Key Features

- High power output 40W (equivalent to 27,000 lumens)
- Beam Divergence 20°, 50°, 100°
- Center wavelength: 808nm
- Optional wavelength: 976nm, 1064nm
- Narrow wavelength spread (10nm)
- Uses highly reliable Vertical Cavity Surface Emitting Laser technology
- Reliable- field operable, IP-65 enclosure
- Operating temperature: -20 to 40°C
- Passive cooling– natural convection
- Wavelength drift with temperature: 0.06nm/°C
- Dimensions: 7.5 x 6.5 x 12 in
- Input power: 200W

株式会社 エム スクエア http://www.mxmco.com info@mxmco.com
〒101-0051 東京都千代田区神田神保町1-34-2F TEL(03)3294-0560 FAX(03)3294-0563
〒815-0041 福岡市南区野間1-10-18 TEL(092)554-6800 FAX(092)554-6802