

15W CW 975nm VCSEL Array Submodule Part # PCW-CS2-15-W0975

- Vertical-Cavity Surface-Emitting Laser technology
- Very high reliability, can operate at high temperatures (up to 80 °C)
- Wavelength stabilized & narrow spectral width (<1nm)
- Easily soldered to heat exchanger

Optical & Electrical Characteristics

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
CW Output Power	22A, 20C Heat-sink	15	18	--	W
Threshold current	20C Heat-sink	--	2	4	A
Operating current	15W, 20C Heat-sink	--	19	22	A
Operating voltage	15W, 20C Heat-sink	--	2.1	2.5	V
Differential resistance	15W, 20C Heat-sink	--	32	36	mΩ
Slope efficiency	20C Heat-sink	0.9	0.95	--	W/A
Conversion efficiency	15W, 20C Heat-sink	40	46	--	%
Center wavelength	15W, 20C Heat-sink	960	975	990	nm
Spectral width (FWHM)	15W, 20C Heat-sink	--	0.8	1	nm
Wavelength shift	20C Heat-sink	--	--	0.070	nm/°C
N.A. (4-sigma)	15W, 20C Heat-sink	--	0.15	0.17	--
Emission area	--	--	2.6x2.6	--	mm ²

Maximum Absolute Ratings

PARAMETER	CONDITIONS
Forward current	50A
Reverse current	25μA
Operating temperature	0 to +80 °C
Storage temperature	-40 to +80 °C

Ordering information

PCW - CS2 - 15 - W0975



Package type

Wavelength (nm)

CW Output Power (W)

Mechanical Characteristics

PARAMETER	VALUE
Package width	6.35 +/-0.1 mm
Package length	6.35 +/-0.1 mm
Package height	0.70 +/-0.1 mm
Thermal resistance	< 0.6 °C/W
Max solder temperature	140 °C
Metalization	Ti/Pt/Au + 12μm Au

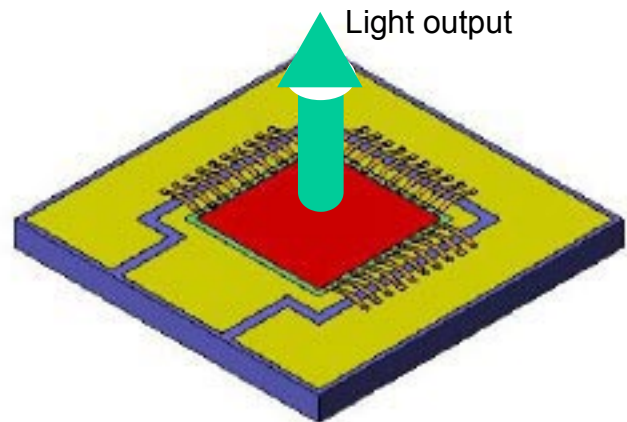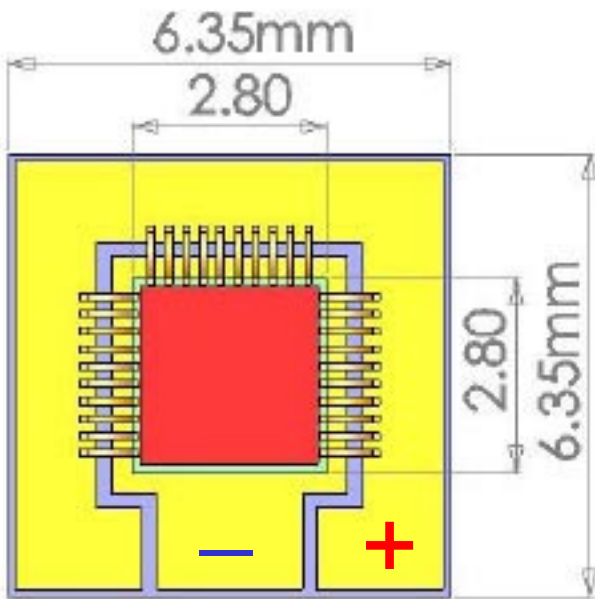

Copyright © 2008 Princeton Optronics, Inc.
All Rights Reserved.

Princeton Optronics reserves the right to change product design and specifications at any time without notice.

No license is granted by implication or otherwise under any patents or patent right of Princeton Optronics. No responsibility is assumed for the use of these products, nor for any infringement on the rights of others resulting from the use of these products

Laser diode product components are intended for use in a user-devised end system. However, these products are capable of emitting Class IV radiation. Extreme care must be exercised during their operation. Only persons familiar with the appropriate safety precautions should operate a laser product. Directly viewing the laser beam or exposure to specular reflections must be avoided. Serious injury may result if any part of the body is exposed to the beam. The eye is extremely sensitive to the infrared radiation and therefore, proper eye-wear must be worn at all times. Use of optical instruments with these products may increase eye hazard. Always wear eye protection when operating.



REV. A – 01/08



株式会社 エム スクエア <http://www.mxmc.co.jp> info@mxmc.co.jp

〒101-0051 東京都千代田区神田神保町1-34-2F TEL (03) 3294-0560 FAX (03) 3294-0563

〒815-0041 福岡市南区野間1-10-18 TEL (092) 554-6800 FAX (092) 554-6802